



Consommation et
Affaires commerciales Canada

Consumer and
Corporate Affairs Canada

Bureau des brevets

Patent Office

Ottawa, Canada
K1A 0C9

(11) (C) 1,328,485

(21) 611,192

(22) 1989/09/13

(45) 1994/04/12

(52) 326-5

(51) INTL.CL.⁵ A61B-017/56

(19) (CA) CANADIAN PATENT (12)

(54) Medical Device for Ultrasonic Treatment of Living Tissue
and/or Cells

(72) Talish, Roger J. , U.S.A.
Lifshey, Arthur L. , U.S.A.

(73) Exogen, Inc. , U.S.A.

(30) (US) U.S.A. 247105 1988/09/14

(57) 28 Claims

BEST AVAILABLE COPY

Canada

BACKGROUND OF THE INVENTION

The invention relates to use of ultrasonic radiation at relatively low levels into living tissue, as for the non-invasive healing treatment of bone fractures, pseudarthroses and the like.

Duarte U.S. Patent 4,530,360 describes a technique of treating bone defects of the character indicated using a pulsed radio-frequency ultrasonic signal applied via a transducer to the skin of a patient and directed to the site of the defect.

10 The radio-frequency signal is in the range of 1.3 to 2 MHz, and it consists of pulses at a repetition rate of 100 to 1,000 Hz, with each pulse having a duration in the range 10 to 2,000 microseconds. The Duarte apparatus comprises a radio-frequency oscillator connected to a driver, and a pulse generator is arranged to control driver output in accordance with a preselected duration and repetition rate of bursts of radio-frequency oscillations in the driver output. A flexible radio-frequency cable connects driver output to a body applicator, in the form of a hand-held plastic tube, one end of which is

20 closed to mount a piezoelectric transducer, in the form of a thin flat disc, excited for thickness resonance.

Necessarily, therefore, in the Duarte apparatus, the source of electrical energy is remote, as on a table top, and the flexible connection to the body applicator must, in use, always be electrically "live" (i.e., electrically common to the remote source and to the body applicator) and, therefore potentially hazardous. Also, for the power levels involved, and considering the fact that two or more transducers seldom can be found to resonate at precisely the same frequency, the

30 radio-frequency must be pretuned to serve one and only one transducer. In other words, apparatus of the Duarte patent



necessarily dedicates the remote signal-generating part of the system to the particular applicator. And any attempt to replace a damaged applicator must involve a tuning rededication of the signal-generator to the newly substituted applicator.

BRIEF STATEMENT OF THE INVENTION

The invention provides for use in the treatment of living tissue and/or cells with ultrasonic radiation, a self-contained treatment-head unit comprising a housing having an external-access port, an ultrasonic generator and a power
10 source connected to said generator and contained within said housing, an ultrasonic transducer connected to said generator and having an active body-application face exposed externally of said housing, said generator being specifically tuned for efficient coupling to said transducer, and control means for said generator including photo-sensitive device means carried within said housing and adapted via said port to produce electrical-control signals governing operation of said generator.

The disclosed body applicator is a self-contained
20 unit with its own radio-frequency oscillator/driver, factory-pretuned to its own transducer. The remote-control unit is limited to the supply of control signals via optical coupling to the oscillator/driver of the body-applicator unit. Another optical coupling from the body-applicator unit to the remote-control unit enables fidelity of applicator performance to be monitored at the remote-control unit. A safety interlock at the body-applicator unit precludes transducer operation in the absence of adequate coupling to a patient's body. The remote-control unit can thus provide all supervisory and control
30 functions for the body-applicator unit without any electrical interconnection between these units.

1328485

60538-1005

DETAILED DESCRIPTION

The invention will be described in detail in conjunction with the accompanying drawings, in which:

Fig. 1 is an overall view of flexibly connected remote-control and body-applicator units of the invention, in the context of providing ultrasonic treatment to damaged bone tissue within an orthopedic cast;

Fig. 2 is an enlarged view in one perspective of the body-applicator unit of Fig. 1 and in an image-reversed perspective of an embedment fixture, said fixture being for embedment in the cast of Fig. 1 and for detachable mounting reception of the body-applicator unit;

Fig. 3 is a fragmentary section which includes the central axis of the transducer and its support, in the body-applicator unit of Figs. 1 and 2, the section half above the central axis and the section half below the central axis being taken in separate orthogonally related planes which intersect along the central axis;

Fig. 4 is a fragmentary side view in elevation, for the aspects of Fig. 3, to show transducer accommodation to a body surface;

Fig. 5 is a block diagram of electrical and optical components of the apparatus of Fig. 1; and

Fig. 6 is a fragmentary block diagram to illustrate a modification.

In Fig. 1, a body-applicator unit (or treatment head) 10 of the invention is shown mounted to an orthopedic cast 11 for treatment of a bone injury or defect in a human leg 12. A flexible cable 13 comprising separate sheathed fiber-optic lines 14, 15 connects the body-applicator unit 10 to a remote-control unit 16, which may be relatively compact and portable, as suggested by a carrying handle 17 and by detachable connectors 18, 19 of optical-transmission lines 14, 15 to the front panel of remote-control unit 16.

The electrical contents, within the housing 20 of the body-applicator unit 10, will be later described in detail, but it suffices for present purposes to state that housing 20 contains storage batteries and a circuit board 21 of oscillator/driver components, with flexible shielded-lead connections 22, 23 to a thin flat transducer element 24. Element 24 may be a commercially available piezoelectric ceramic disc, as of the lead-zirconium-titanate material

known as PZT-4. Element 24 will be understood to include a separate foil electrode bonded to each of its front and back surfaces, to enable thickness fluctuation in response to driven excitation via connections 22, 23. Transducer 24 is bonded to the inner surface of the closed end wall of a cupped shell 25 having a base flange 26. An inner wall 27 is secured to shell 25 and is spaced from and behind transducer 24, to provide a seat for softly yielding compliant suspension of shell 25 and transducer 24 via a cylindrical body 28 of foamed plastic.

10 To provide suspension support for shell 25 and transducer 24, the housing 20 is integrally formed with a tubular projecting cylindrical wall 29 having an inturned flange 30 at its outer end, for flange 26 engagement, thus outwardly limiting shell 25 projection to the extent D beyond the open end of the projecting wall 29, as shown in Fig. 3. At the base end of the wall 29, a panel 31 secured to housing 20 provides a seating base for the other axial end of the compliant body 28 of foamed plastic. The described mounting of transducer 24 will be seen to provide an axially compliant
20 suspension, with gentle yielding for axially inward deflection, and with a generous degree of axial misalignment capability, away from the axis of wall 29, all as suggested in Fig. 4 for the case of a misalignment angle α and reduced projecting offset D', when in self-adapting application to a local patient-body surface 32.

 A phantom outline at 33 will be understood to indicate preferred use of a flexible plastic sleeve, as of vinyl or silicone, circumferentially bonded to the axially outer rim of shell 25 and having sliding overlap with the
30 cylindrical wall 29. Sleeve 33 in no way interferes with the misalignability described in connection with Fig. 4, but it

does protect against entry of foreign matter via the running fit of shell 25 to the opening of housing flange 30.

At spaced locations about the base end of the projecting cylindrical wall 29, housing 20 is provided with means for coaction with corresponding features of an expendable mounting fixture 35, which may be of injection-molded plastic but which can also be suitably formed by thermal slumping from plastic sheet material of suitable gauge. Fixture 35 is expendable because it is designed for embedded incorporation in
10 an orthopedic cast, as at a locally cut access opening in stockinette, prior to development of the retaining plaster of the cast.

As shown in Fig. 2, fixture 35 is of generally rectangular outline, providing an outward flange 36 which extends peripherally around a truncated-pyramid wall 37 which positions its truncation face 38 for confronting acceptance of and removably retained engagement with the transducer-supporting side of the body-applicator unit 10. The offset extent of face 38 from flange 36 is in the order of one
20 centimeter, to enable adequate building of casting plaster above flange 36.

The center of face 38 is characterized by an opening defined by an integrally formed cylindrical flange 39 for insertional telescopically piloting acceptance of the cylindrical wall 29 of unit 10. The preferred engagement to unit 10 is of bayonet-locking variety, being shown on housing
20 to comprise two outwardly projecting studs 40 at diametrically opposite but radially equal offset locations on housing 20, with respect to the central axis of the projecting
30 cylindrical wall 29. Studs 40 are enterable into diametrically opposite enlargements 41, at corresponding ends of arcuate and

narrowed slots 42; and studs 40 are circumferentially grooved at 40' to accommodate local fixture thickness at face 38. Thus, once studs 40 are inserted at enlargements 41, unit 10 may be bodily rotated with respect to fixture 35 to complete the bayonet-locking engagement of studs 40 to slots 42.

The upper half-section of Fig. 3 additionally shows that, at diametrically opposite locations which are at 90°-offset from studs 40, the transducer side of housing 20 also mounts two normally open switches 43 having actuator buttons 44 which project outwardly but which, upon inward depression (as when the bayonet-locking engagement is effected) will close their respective contacts. These contacts will be understood to provide a safety-interlock feature, operative upon circuitry within unit 10, whereby no battery power can be supplied to the oscillator/driver in the absence of concurrent closure of both switches 43.

To assure frictional retention of the bayonet-locked engagement, Figs. 2 and 3 show switch actuator buttons 44 to project beyond local land formations 45 of housing 20, and these land formations ride up cam or ramp slopes 46 to lands 47 in the face 38 of fixture 35, in the

course of the relative rotation which moves studs 40 from entry openings 41 and into their other or "home" engagement positions in arcuate slots 42. After such ramping, slot-42 engagements in the grooves of studs 40 retain an axial bias of the frictional engagement between lands 45, 47.

In the diagram of Fig. 5, the body-applicator unit 10 is seen to contain battery means 50 which, subject to closure of the safety-interlock switching means 43, supplies power for local operation of (a) an opto-receiver 51, (b) an oscillator/driver 52 that is specifically tuned for optimum coupling to transducer 24, (c) signal-monitoring means 53, and (d) an opto-driver 54. The opto-receiver 51 may be a photodiode which receives control pulses via optical-fiber line 14 from the remote-control unit 16 and which provides (in line 55) corresponding electrical-pulse output for on/off control of the oscillator/driver 52 and, therefore, for on/off control of transducer 24 operation. A connection 56 enables the signal-monitoring means 53 to provide an output signal in line 57 to opto-driver 54, which may be a light-emitting diode, whereby the monitoring signal may be transmitted via fiber-optic line 15 back to the remote-control unit 16. The parenthetic legend "1.5 MHz" at 52 in Fig. 5 will be understood only to be typical of the tuned frequency at which it is to operate, due to physical thickness-resonance properties of the particular transducer 24 which it is connected to drive, such tuned frequency being generally within the range 1.3 to 2.0 MHz.

At and within the remote-control unit 16, local power-supply means 60 operate from externally available household-voltage supply, and its single showing of output "VCC" will be understood to schematically designate local power supply as necessary for all electronic components within unit 16, subject to switching via an on/off toggle 59 at the front panel of unit 16. Thus powered, a pulse generator 61, in conjunction with a pulse-width controlling device 62, which may be a one-shot multivibrator, develops control pulses of predetermined width and repetition rate,

for ultimate on/off operation of the oscillator/driver 52 of the body-applicator unit 10. As shown, such operation can only proceed as long as an AND device 63 certifies that it is receiving, from a treatment timer 64, a signal indicating that the treatment time, initiated by a "start" button 65, has not yet been timed out. Pulsed output of AND device 63 is delivered directly to an opto-driver 66, which may be a light-emitting diode coupled for transmission of corresponding light pulses in fiber-optic line 14 to unit 10.

10 Within the body-applicator unit 10, a further function of the signal-monitoring means 53 is to test for compliance (with intended signal transmission to the patient). Specifically, (a) if the signal changes, or (b) if the battery output is less than a predetermined operating level, then a "no-compliance" signal is sent to the control unit 16, via fiber-optic connection 15 to "Non-Compliance/Disable" means 67 in unit 16; the function of means 67 is to allow only the correct intended signal to be sent (by opto-driver 66 and fiber-optic connection 14) to the applicator unit 10. As to
20 (a) above, a signal change which exceeds a predetermined value will be understood to reflect failure of the active face of transducer 24 to achieve a predetermined level of efficiency in the coupling of ultrasonic energy to the intended body tissue. Thus, if coupling means, such as a gel 25' interposed between the transducer wall of shell 25 and adjacent body tissue, provides insufficient coupling, whether through use of an insufficient quantity of gel, or if a plaster fragment interferes with full resiliently loaded application of profile-adapting action (as in Fig. 4), the signal-monitoring means
30 will detect this coupling insufficiency and will communicate the same to the non-compliance/disable means 67 of the control

1328485

60538-1005

unit 16, for an automatic shut-down of the operation, via a "shut-down" signal in line 69. An alarm circuit 70 is shown connected for operation in response to this detected circumstance. Finally, an elapsed-time indicator 71 (which need not externally display its current value indication) is shown connected separately to the output line of control-pulse transmission and to the non-compliance/disable means 67, whereby total treatment time at 71 will reflect tally of increments of treatment time only as long as the signal pulses monitored at 53 have been found to compare favorably with intended signal transmission to the patient. Time-out of a treatment period at 64 will foreclose AND-circuit passage of control pulses to opto-driver 66, thus foreclosing time advance at elapse-time indicator

10

71. Also, failure to close both switches 43 is operative to disable battery (50) supply to the various components of unit 10, thereby foreclosing monitor 53 from detecting compliance and also therefore foreclosing time advance at indicator 71.

The parenthetic indication of a 1-KHz pulse-repetition rate at 61 and of a 200-microsecond control-pulse duration at 62 will be understood to be typical and illustrative but not necessarily critical, in that, as taught by Duarte, pulse-repetition rate may suitably be in the range between 100 and 1,000 Hz, and control-pulse duration may suitably be in the range between 10 and 2,000 microseconds. Also the 20-minute treatment time, indicated at 64, will be understood to be typical, for one treatment per day, in that other treatment times and number of treatments per day may also be therapeutically beneficial. Generally, and desirably, the average intensity of ultrasonic energy delivered to the body is in the range of 1 to 50 milliwatts/cm².

Although fiber-optic flexible transmission lines have been shown as the preferred technique and coupling between control unit 16 and the body-applicator unit 10, this is only illustrative. For example, if the patient is one of several who are bed-ridden and unable to move, then there is no reason why the controlling light pulses could not be transmitted by directed beam to the receiving device 51 of each of a plurality of body-applicator units. By the same token, the control unit 16 can provide control-pulse sourcing and compliance-monitoring functions for each of a plurality of body-applicator units that are optically coupled to the same control unit 16. The fragmentary diagram of Fig. 6 illustrates such a situation wherein the components 63, 66, 67, 68 and 70 of Fig. 5 can be recognized for their corresponding functions in Fig. 6; essentially the only difference is suggested by beam-splitter means 72 which divides the pulsed-light output of driver 66 into separate lines of connection to fiber-optic control lines 14, 14' to the respective plural units 10. Similarly, fiber-optic lines 15, 15' from the separate units 10 are served by separate opto-receivers 68, 68' and by separate compliance monitors 67, 67', each of which derives its conformance reference from the same control-pulse line 69.

Description of the front panel of control unit 16 is completed by identifying different-color indicator lamps 75, 76, 77 which are indicative of current system status. For example, a "standby" lamp 75 may be amber and indicative
5 of current operation within the treatment-time period of timer 64; a "complete" lamp 76 may be blue and indicative of completion of the treatment period time at 64; and a "trouble" lamp 77 may be red and indicative of a non-compliance detection at 67. Finally, an "active"
10 indicator lamp at 78 may be green and indicative of readiness to commence a timed treatment.

Although the use of light pulses for communication between units 16 and 10 has been described without reference to specific wavelengths, it is to be under-
15 stood that for particular purposes infrared-transmission may be more desirable than visible-light transmission, or vice versa; thus, LED devices may be used for transmission, in visible-light applications, or in infrared-transmitting applications; alternatively,
20 laser devices may be used with digitally coded information, using currently available technology.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. For use in the treatment of living tissue and/or cells with ultrasonic radiation, a self-contained treatment-head unit comprising a housing having an external-access port, an ultrasonic generator and a power source connected to said generator and contained within said housing, an ultrasonic transducer connected to said generator and having an active body-application face exposed externally of said housing, said generator being specifically tuned for efficient coupling to said transducer, and control means for said generator including photo-sensitive device means carried within said housing and adapted via said port to produce electrical-control signals governing operation of said generator.
2. The unit of claim 1, in which said housing has a second external-access port and in which signal-monitoring means is contained within said housing and is connected to said generator, said signal-monitoring means including means for detecting a generator-output signal change which exceeds a predetermined value and for producing a monitor-output signal upon detection of such change, and means including a light source, said means being adapted via said second port for externally and optically communicating said monitor-output signal.
3. The unit of claim 2, in which said housing includes, at said second part, adapter means for detachably coupling an optical fiber to light from said light source.
4. The unit of claim 1, wherein sound coupling means is

interposed between the transducer and body tissue for ultrasonic communication with body tissue.

5. The unit of claim 4, wherein said sound-coupling means is a gel.

6. The unit of claim 4, in which signal monitoring means is provided in said housing for detection of a failure to achieve a predetermined level of efficiency in the coupled transmission of ultrasound output to the body tissue, said signal monitoring means producing an output signal upon such a detected failure.

7. For use in the treatment of living tissue and/or cell with ultrasonic radiation, a self-contained treatment-head unit comprising a housing having an external-access port, an ultrasonic generator and a power source connected to said generator and contained within said housing, an ultrasonic transducer electrically connected to said generator and having an active body-application face exposed externally of said housing, said generator being specifically tuned for efficient coupling to said transducer, and control means for said generator including photo-sensitive device means carried within said housing and adapted via said port to produce electrical-control signals governing operation of said generator, all electrical connections between said power source, said generator, said transducer and said photo-sensitive device being self-contained within said housing.

8. The unit of claim 1 or claim 2, wherein said photo-sensitive device is infrared-sensitive.

9. The unit of claim 1 or claim 2, wherein said photo-sensitive device is sensitive to visible light.
10. The unit of claim 7 or claim 1, wherein said housing includes, at said port, adapter means for detachably coupling an optical fiber to said photo-sensitive device.
11. The unit of claim 7 or claim 1, in which said generator includes an oscillator that is tunable in the range of 1.3 to 2 megahertz.
12. The unit of claim 7 or claim 1, in which the output intensity level of said transducer when driven by said generator is in the range 1 to 50 milliwatts/cm².
13. The unit of claim 7 or claim 1, in which said transducer is mechanically isolated from said housing by a softly compliant suspension, said compliant suspension providing a range of local universal angular self-adapting application of the body-application face of said transducer to a body-contour orientation.
14. The unit of claim 7 or claim 1 in combination with a mounting-adaptor unit for incorporation in an orthopedic cast, said adapter unit having a central aperture, and said housing and said adapter unit having coacting locking formations arrayed about said transducer and about said central aperture, whereby upon locking engagement of said treatment-head unit to said adapter unit that has been incorporated into an orthopedic cast, said transducer is held by said treatment-head unit and by said adapter unit in local body-confronting relation to a

body locale that is otherwise surrounded by the orthopedic cast.

15. The unit of claim 7 or claim 1, in combination with a mounting-adapter unit for incorporation in an orthopedic cast, said adapter unit having a central aperture, and said housing and said adapter unit having coacting locking formations arrayed about said transducer and about said central aperture, whereby upon locking engagement of said treatment-head unit to said adapter unit that has been incorporated into an orthopedic cast, said transducer is held by said treatment-head unit and by said adapter unit in local body-confronting relation to body locale that is otherwise surrounded by the orthopedic cast, said transducer being softly compliantly suspended by said housing at projected offset away from said housing, said offset being sufficient to project said transducer through and beyond the central aperture of said adapter unit when in locked assembly thereto.

16. The unit of claim 7 or claim 1, in combination with a mounting-adapter unit for incorporation in an orthopedic cast, said adapter unit having a central aperture, and said housing and said adapter unit having coacting locking formations arrayed about said transducer and about said central aperture, whereby upon locking engagement of said treatment-head unit to said adapter unit that has been incorporated into an orthopedic cast, said transducer held by said treatment-head unit and by said adapter unit in local body-confronting relation to a body locale that is otherwise surrounded by the orthopedic cast, at least one normally open unactuated switch being mounted to said housing and including an actuating button which projects

outward of said housing for inward switch-closing actuation upon assembly to said adapter unit, and means including a light source having a control connection to said switch and being adapted via a second port in said housing to externally communicate the integrity of assembly of the treatment-head unit to the adapter unit, whereby electrically operation of said treatment-head unit can be initiated upon such assembly.

17. The unit of claim 7 or claim 1, in combination with a mounting-adapter unit for incorporation in an orthopedic cast, said adapter unit having a central aperture, and said housing and said adapter unit having coacting locking formations arrayed about said transducer and about said central aperture, whereby upon locking engagement of said treatment-head unit to said adapter unit that has been incorporated into an orthopedic cast, said transducer is held by said treatment-head unit and by said adapter unit in local body-confronting relation to a body locale that is otherwise surrounded by the orthopedic cast, said locking formations being of bayonet-locking variety.

18. The unit of claim 7 or claim 1, in combination with a mounting-adapter unit for incorporation in an orthopedic cast, said adapter unit having a central aperture, and said housing and said adapter unit having coacting locking formations arrayed about said transducer and about said central aperture, whereby upon locking engagement of said treatment-head unit to said adapter unit that has been incorporated into an orthopedic cast, said transducer is held by said treatment-head unit and by said adapter unit in local body-confronting relation to a body locale that is otherwise surrounded by the orthopedic cast, said locking formations of both said treatment-head unit

and said adapter unit being symmetrically arrayed about said transducer.

19. The unit of claim 7 or claim 1, in combination with a remote-control unit wherein flexible fiber-optic means provide the only interconnection of said treatment-head unit to said remote-control unit, said fiber-optic means including a coupling of said remote-control unit to said photo-sensitive device, said remote-control unit containing (a) a light source adapted to irradiate one end of said fiber-optic coupling and (b) means for modulating light from said source, whereby operation of said transducer is controlled by modulated light from said light source.

20. The unit of claim 7 or claim 1, in combination with a remote-control unit wherein flexible fiber-optic means provide the only interconnection of said treatment-head unit to said remote-control unit, said fiber-optic means including a coupling of said remote-control unit to said photo-sensitive device, said remote-control unit containing (a) a light source adapted to irradiate one end of said fiber-optic coupling and (b) means for modulating light from said source, whereby operation of said transducer is controlled by modulated light from said light source, signal monitoring means within said housing for producing an output signal upon generator-output failure to meet a predetermined criterion, a light source in said housing for externally communicating the existence of such failure, said remote-control unit including a monitoring photo-sensitive element, said fiber-optic means including a further coupling of the monitoring photo-sensitive element to the light source in said housing, and an electrical connection from said

monitoring photo-sensitive element to the light source in said remote-control unit for disabling modulated-light transmission to said treatment-head unit in the event of such failure.

21. The unit of claim 7 or claim 1, in combination with a remote-control unit wherein flexible fiber-optic means provide the only interconnection of said treatment-head unit to said remote-control unit, said fiber-optic means including a coupling of said remote-control unit to said photo-sensitive device, said remote-control unit containing (a) a light source adapted to irradiate one end of said fiber-optic coupling and (b) means for modulating light from said source, whereby operation of said transducer is controlled by modulated light transmitted from said light source, signal monitoring means within said housing for producing an output signal upon generator-output failure to meet a predetermined criterion.

22. The unit of claim 7 or claim 1, in combination with a mounting-adapter unit for incorporation in an orthopedic cast, said adapter unit having a central aperture, and said housing and said adapter unit having coacting locking formations arrayed about said transducer and about said central aperture, whereby upon locking engagement to said adapter unit that has been incorporated into an orthopedic cast, said transducer is held by said adapter unit in local body-confronting relation to a body locale that is otherwise surrounded by the orthopedic cast, at least one normally open unactuated switch being mounted to said housing and including an actuating button which projects away from said housing for inward switch-closing actuation upon assembly to said adapter unit, and said switch when in closed condition having a control connection for

enabling electrical excitation of said transducer.

23. For use in the treatment of living tissue and/or cells with ultrasonic radiation, a self-contained treatment-head unit comprising a housing having an external-access port, an ultrasonic generator and a power source connected to said generator and contained within said housing, an ultrasonic transducer connected to said generator and having an active body-application face exposed externally of said housing, said generator being specifically tuned for efficient coupling to said transducer, and control means for said generator including photo-sensitive device means carried within said housing and adapted via said port to produce control signals governing operation of said generator; the active face of said transducer being mounted to a flat protective panel of a material that is transparent to ultrasonic radiation by said transducer, whereby said panel is the effective body-application face of said transducer, said panel being the closed end of a cupped shell having compliantly yieldable telescoping fit to said housing, said cupped shell having a second panel spaced from said protective panel and from said transducer, and a foamed plastic body abutting said second panel and contained within said shell and a portion of said housing to provide compliant yieldability of said telescoping fit.

24. The unit of claim 7 or claim 23, in which said transducer is a thin piezoelectric disc.

25. The unit of claim 7 or claim 23, in which said transducer is a thin piezoelectric disc of lead/zirconium/titanate variety.

26. For use in the treatment of living tissue and/or cells with ultrasonic radiation, a self-contained treatment-head unit comprising a housing having an external-access port, an ultrasonic generator and a power source connected to said generator and contained within said housing, an ultrasonic transducer connected to said generator and having an active body-application face exposed externally of said housing, said generator being specifically tuned for efficient coupling to said transducer, and control means for said generator including photo-sensitive device means carried within said housing and adapted via said port to produce control signal governing operation of said generator; the active face of said transducer being mounted to a flat protective panel of material that is transparent to ultrasonic radiation by said transducer, whereby said panel is the effective body-application face of said transducer, said panel being the closed end of a cupped shell having a compliantly yieldable telescoping fit to said housing, said telescoping fit being relatively loose so as to afford a range of compliantly yieldable body-adapting angular displacement of said panel with respect to said housing.

27. The unit of claim 26, and including a foamed plastic body contained within said shell and within a portion of said housing to provide the compliant yieldability of said telescoping fit.

28. The unit of claim 26, and a flexible protective sleeve peripherally fixed to said shell near the closed end of

1328485

60538-1005

said shell and in at least partial overlap with said housing at the region of telescoping fit.

SMART & BIGGAR
OTTAWA, CANADA





PATENT AGENTS



$\frac{1}{2}$

This diagram shows a portable electronic device, possibly a pulse generator, with a rectangular case and a handle (16). The device has several control elements on its front panel, including a switch (59), a dial (75), and several indicator lights or buttons (76, 77, 78). A cable (14) is connected to the device and leads to a small rectangular unit (10) attached to a leg (11). The leg is shown in a cross-sectional view with a dashed line (12) indicating the internal structure. The unit (10) is connected to the leg via a dashed line (13) and a solid line (25).

1900
 1901
 1902
 1903
 1904
 1905
 1906
 1907
 1908
 1909
 1910
 1911
 1912
 1913
 1914
 1915
 1916
 1917
 1918
 1919
 1920
 1921
 1922
 1923
 1924
 1925
 1926
 1927
 1928
 1929
 1930
 1931
 1932
 1933
 1934
 1935
 1936
 1937
 1938
 1939
 1940
 1941
 1942
 1943
 1944
 1945
 1946
 1947
 1948
 1949
 1950
 1951
 1952
 1953
 1954
 1955
 1956
 1957
 1958
 1959
 1960
 1961
 1962
 1963
 1964
 1965
 1966
 1967
 1968
 1969
 1970
 1971
 1972
 1973
 1974
 1975
 1976
 1977
 1978
 1979
 1980
 1981
 1982
 1983
 1984
 1985
 1986
 1987
 1988
 1989
 1990
 1991
 1992
 1993
 1994
 1995
 1996
 1997
 1998
 1999
 2000
 2001
 2002
 2003
 2004
 2005
 2006
 2007
 2008
 2009
 2010
 2011
 2012
 2013
 2014
 2015
 2016
 2017
 2018
 2019
 2020
 2021
 2022
 2023
 2024
 2025
 2026
 2027
 2028
 2029
 2030
 2031
 2032
 2033
 2034
 2035
 2036
 2037
 2038
 2039
 2040
 2041
 2042
 2043
 2044
 2045
 2046
 2047
 2048
 2049
 2050
 2051
 2052
 2053
 2054
 2055
 2056
 2057
 2058
 2059
 2060
 2061
 2062
 2063
 2064
 2065
 2066
 2067
 2068
 2069
 2070
 2071
 2072
 2073
 2074
 2075
 2076
 2077
 2078
 2079
 2080
 2081
 2082
 2083
 2084
 2085
 2086
 2087
 2088
 2089
 2090
 2091
 2092
 2093
 2094
 2095
 2096
 2097
 2098
 2099
 2100
 2101
 2102
 2103
 2104
 2105
 2106
 2107
 2108
 2109
 2110
 2111
 2112
 2113
 2114
 2115
 2116
 2117
 2118
 2119
 2120
 2121
 2122
 2123
 2124
 2125
 2126
 2127
 2128
 2129
 2130
 2131
 2132
 2133
 2134
 2135
 2136
 2137
 2138
 2139
 2140
 2141
 2142
 2143
 2144
 2145
 2146
 2147
 2148
 2149
 2150
 2151
 2152
 2153
 2154
 2155
 2156
 2157
 2158
 2159
 2160
 2161
 2162
 2163
 2164
 2165
 2166
 2167
 2168
 2169
 2170
 2171
 2172
 2173
 2174
 2175
 2176
 2177
 2178
 2179
 2180
 2181
 2182
 2183
 2184
 2185
 2186
 2187
 2188
 2189
 2190
 2191
 2192
 2193
 2194
 2195
 2196
 2197
 2198
 2199
 2200
 2201
 2202
 2203
 2204
 2205
 2206
 2207
 2208
 2209
 2210
 2211
 2212
 2213
 2214
 2215
 2216
 2217
 2218
 2219
 2220
 2221
 2222
 2223
 2224
 2225
 2226
 2227
 2228
 2229
 2230
 2231
 2232
 2233
 2234
 2235
 2236
 2237
 2238
 2239
 2240
 2241
 2242
 2243
 2244
 2245
 2246
 2247
 2248
 2249
 2250
 2251
 2252
 2253
 2254
 2255
 2256
 2257
 2258
 2259
 2260
 2261
 2262
 2263
 2264
 2265
 2266
 2267
 2268
 2269
 2270
 2271
 2272
 2273
 2274
 2275
 2276
 2277
 2278
 2279
 2280
 2281
 2282
 2283
 2284
 2285
 2286
 2287
 2288
 2289
 2290
 2291
 2292
 2293
 2294
 2295
 2296
 2297
 2298
 2299
 2300
 2301
 2302
 2303
 2304
 2305
 2306
 2307
 2308
 2309
 2310
 2311
 2312
 2313
 2314
 2315
 2316
 2317
 2318
 2319
 2320
 2321
 2322
 2323
 2324
 2325
 2326
 2327
 2328
 2329
 2330
 2331
 2332
 2333
 2334
 2335
 2336
 2337
 2338
 2339
 2340
 2341
 2342
 2343
 2344
 2345
 2346
 2347
 2348
 2349
 2350
 2351
 2352
 2353
 2354

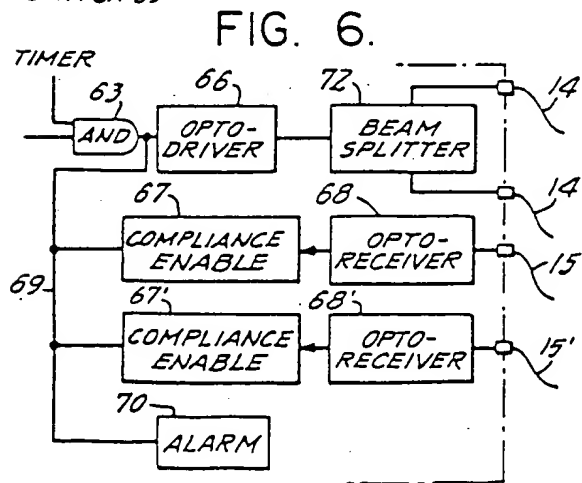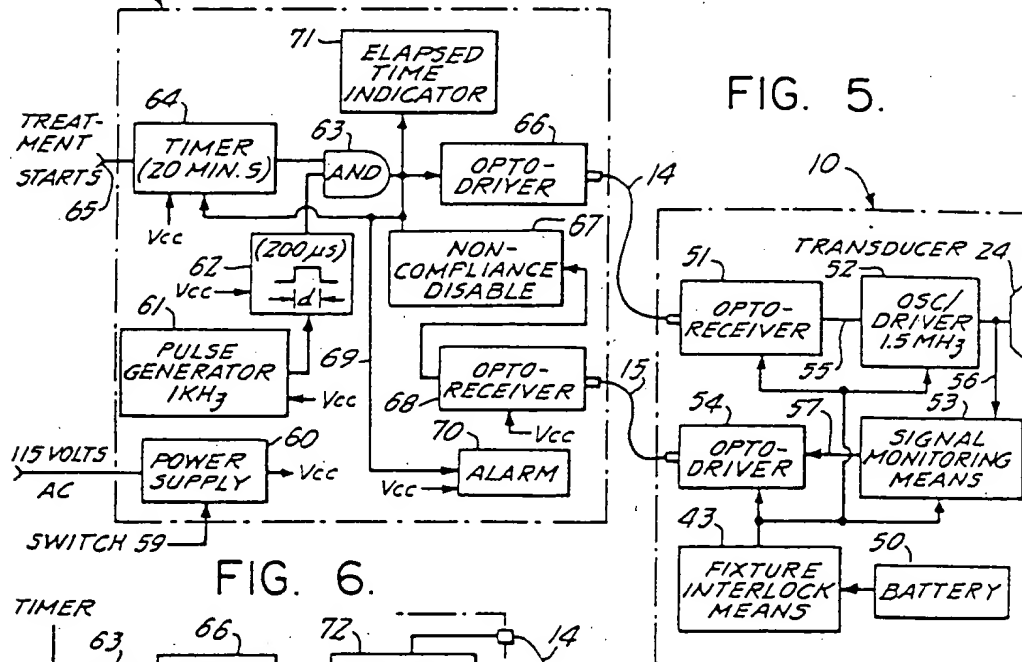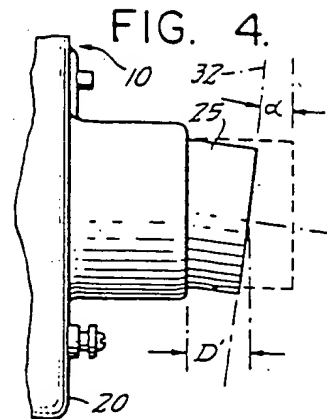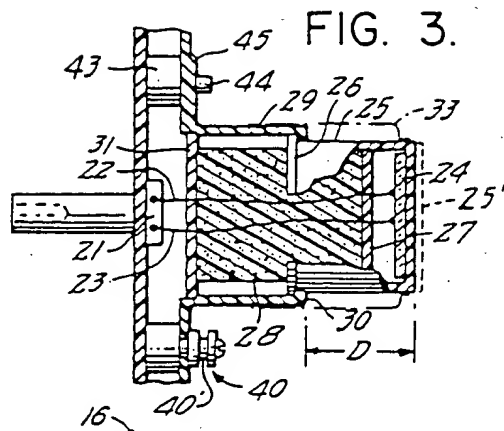

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.